

KOMATSU

WA500-8

Yard loader



Net horsepower

353 HP (263 kW) @ 1,900 rpm

Operating weight

82,349–83,090 lbs. (37,353–37,698 kg)

Bucket capacity

8.2–9.8 yd³ (6.3–7.5 m³)

Make every pass count

Built to increase production

A newly designed, bigger bucket and an auto-digging system maximize bucket fill while minimizing operator fatigue.

High performance powertrain

Large-capacity torque converter, combined with Komatsu Smart Loader Logic engine control system, automatically creates enough torque for each work phase, reducing fuel consumption with no decrease in production.

Brake cooling system

Efficient performance and added confidence in load and carry situations with front and rear brake cooling system.

Low fuel consumption

Reduce idle time and save fuel with auto idle shutdown. Smart Loader Logic acquires data from various sensors in the loader and controls engine torque based on job requirements.

Comfortable operator environment

A more comfortable ride with a new standard, heated, air-suspension seat that provides enhanced support on rough roads. A large, quiet, pressurized cab provides excellent visibility.



Photos may include optional equipment.

Net horsepower

353 HP (263 kW) @ 1,900 rpm

Operating weight

82,349–83,090 lbs. (37,353–37,689 kg)

Bucket capacity

8.2–9.8 yd³ (6.3–7.5 m³)

Performance, durability and fuel economy

Large capacity torque converter with lock-up provides:

- Quick acceleration
- Lock-up in 2nd, 3rd and 4th gear

A powerful **Komatsu SAA6D140E-7 engine** provides a net output of 353 HP (263 kW) with up to 5% improved fuel consumption. This engine is EPA Tier 4 Final emissions certified.

Variable Geometry Turbocharger (VGT) uses a hydraulic actuator to provide optimum air flow under all speed and load conditions.

Komatsu Diesel Particulate Filter (KDPF) and Selective Catalytic Reduction (SCR) systems reduce particulate matter and NOx, while providing automatic regeneration that does not interfere with daily operation.

Fluid neutral or better

Consumption of fuel and diesel exhaust fluid (DEF) is designed to be less than or equivalent to the amount of fuel consumed by the prior model.

Cooling

- Auto-reversing fan is standard
- Hydraulically driven, variable-speed fan
- Wider core coolers resist clogging
- Swing-out fan for easy cleaning

Remote boom and bucket positioners allow kickouts to be set from inside the cab.

Variable displacement piston pumps with Closed-Center Load Sensing System (CLSS) provide quick response and smooth operation to maximize productivity.

Rearview monitoring system (standard)

Advanced diagnostic system continuously monitors machine operation and vital systems to identify machine issues and assist with troubleshooting.

Transmission mode select system (3 modes) allows shifting mode to be matched more efficiently to varying work applications.

Enhanced working environment

- New high-capacity, heated, air suspension seat
- Seat-mounted EPC controls with F-N-R switch
- Two 12V power outlets
- Bluetooth radio

New front fender is changed from steel to composite material for resistance to scratches and impact.

Full rear fenders (standard) swing open for easy access to maintenance points.

Komatsu auto idle shutdown helps reduce idle time and operating costs.

Komatsu Smart Loader Logic helps reduce fuel consumption with no decrease in production.



Large LCD color monitor panel

- 7" high-resolution, multi-color screen is easy to read
- Integrated load meter system displays payload data directly on the monitor panel
- Includes an "Ecology" gauge and provides guidance for greater fuel efficiency
- Onboard diagnostics do not require use of a laptop computer
- Easy-to-navigate menus allow operators to change settings, review machine performance records and track periodic maintenance items

External mounting of engine air filter (above rear LH fender) provides easy access for maintenance.

Komatsu telematics solutions: Telematics data can drive results for business operations, but only when you can collect and analyze it efficiently. We've designed a system that makes it easy to collect, visualize and monitor telematics data from both Komatsu machines and other OEM machines.

My Komatsu, our comprehensive digital hub, analyzes telemetric data from your on-machine technology — Komtrax and Komtrax Plus, or ISO API 15143-3 (AEMP 2.0) data from other OEMs — and displays it on easy-to-read dashboards. Now you can finally get the powerful analytics you need to manage your costs and enhance your fleet's efficiency without a complicated process or expensive third-party solutions.

Battery disconnect switch allows a technician to disconnect the power supply before servicing the machine.

Operator identification system can track machine operation for up to 100 operators.

Yard loader features

If you're looking to load, transport or move material, Komatsu large wheel loaders offer a great combination of productivity, fuel efficiency, operator comfort and ease of maintenance. They're engineered to help move more material faster, move more trucks out of the yard, and move your business forward.

Large capacity bucket cylinder provides increased power and control to help handle big loads.

Large capacity bucket is optimized based on material density, with up to 9.8 yd³ (7.5 m³) capacity. This helps increase productivity in applications such as truck loading, carrying, stock piling and charging hoppers.



Photo may include optional equipment.

Advanced Joystick Steering System (optional)

helps to reduce operator fatigue in repetitive V-cycle loading.

Additional counterweight

helps improve stability, and allows for increased bucket capacity while the contoured shape maximizes ground clearance for stock piling applications.



875/65 tires increase ground contact area for improved stability. The low profile also reduces sidewall flex for more stability while dumping into trucks or hoppers.

Brake cooling system (front and rear)

helps control brake temperatures in higher speed applications to ensure optimum performance in load and carry situations.

Tailor-made for loading on-highway trucks or your quarry needs that require a powerful engine and excellent stability, the WA500-8 has durable frames, axles and driveline components for efficient loading.

General specifications

Engine*

Model	Komatsu SAA6D140E-7*		
Type	Water-cooled, 4-cycle		
Aspiration	Variable geometry turbocharged, aftercooled, cooled EGR		
Number of cylinders	6		
Bore x stroke	140 mm x 165 mm 5.51" x 6.50"		
Piston displacement	15.24 L 930 in ³		
Horsepower			
SAE J1995	Gross	266 kW	357 HP
ISO 9249 / SAE J1349	Net	263 kW	353 HP
	Rated rpm	1,900	
Fan drive method for radiator cooling	Hydraulic		
Governor	All-speed, electronic		
Fuel system	Direct injection		
Lubrication system			
	Method	Gear pump, force-lubrication	
	Filter	Full-flow type	
Air cleaner	Dry type with double elements and dust evacuator, plus dust indicator		

*EPA Tier 4 Final emissions certified.

Hydraulic system

Steering system

Hydraulic pump	Piston type		
Capacity	120 L/min	31.7 gal/min	at rated rpm
Relief valve setting	24.5 MPa	250 kg/cm ²	3,555 psi

Hydraulic cylinders

Type	Double-acting, piston type		
Number of cylinders	2		
Bore x stroke	100 mm x 486 mm 3.9" x 19.1"		

Loader control

Hydraulic pump	Piston pump		
Capacity	320 L/min	84.8 gal/min	at rated rpm
Relief valve settings	34.3 MPa	350 kg/cm ²	4,980 psi

Hydraulic cylinders

Type	Double-acting, piston type		
Number of cylinders (bore x stroke)			
Boom cylinder	2-160 mm x 898 mm 6.3" x 35.4"		
Bucket cylinder	1-200 mm x 645 mm 7.9" x 25.4"		

Control valve	2-spool type		
---------------	--------------	--	--

Control positions

Boom	Raise, hold, lower, and float
Bucket	Tilt-back, hold, and dump

Hydraulic cycle time (rated load in bucket)

Raise	7.2 s
Dump	1.7 s
Lower (empty)	4.2 s

Brakes

Service brakes	Hydraulically actuated, wet disc brakes actuate on four wheels
Parking brake	Wet disc brake
Emergency brake	Parking brake is commonly used

Steering system

Type	Articulated type, fully hydraulic power steering
Steering angle	36° (40° to max end stop)
Minimum turning radius at the center of outside tire	7,050 mm 23' 2"

Transmission

Torque converter	Three-elements, one-stage, two-phase		
Transmission	Full-powershift, planetary type		
	Travel speed		
	Forward*	Reverse*	
	1st	7.5 km/h 4.7 mph	8.5 km/h 5.3 mph
	2nd	12.9 km/h 8.0 mph (13.1 km/h 8.1 mph)	12.9 km/h 8.0 mph (13.0 km/h 8.1 mph)
	3rd	22.2 km/h 13.8 mph (23.7 km/h 14.7 mph)	24.7 km/h 15.3 mph (26.6 km/h 16.5 mph)
	4th	35.5 km/h 22.1 mph (37.3 km/h 23.2 mph)	38.0 km/h 23.6 mph (38.0 km/h 23.6 mph)

*P-mode Measured with 29.5-25 tires (:): Lock-up clutch ON


Axles and final drives

Drive system	Four-wheel drive
Front	Fixed, full-floating
Rear	Center-pin support, full-floating, 20° total oscillation
Reduction gear	Spiral bevel gear
Differential gear	Conventional type
Final reduction gear	Planetary gear, single reduction

Service refill capacities

Cooling system	110 L	29.1 US gal
Fuel tank	473 L	124.9 US gal
Engine	37 L	9.8 US gal
Hydraulic system	337 L	89.0 US gal
Axle (each front and rear)	95 L	25.1 US gal
Torque converter and transmission	71 L	18.8 US gal
DEF tank	36 L	9.5 US gal

Bucket selection guide

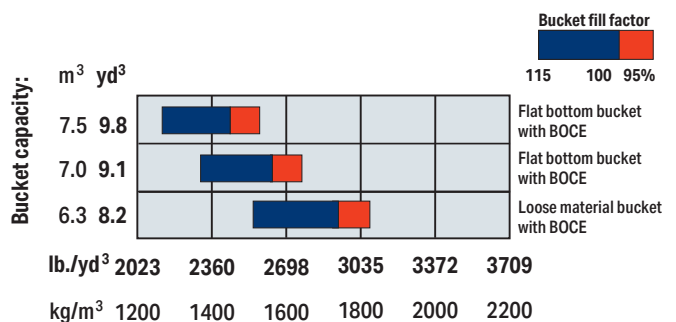


Material density: kg/m³ lb./yd³

Dimensions

Tread width (center of tread to center of tread)	2,420 mm	7'11"
Width over tires	3,302 mm	10'10"
A Wheelbase	3,780 mm	12'5"
B Hinge pin height, max. height	4,755 mm	15'7"
C Hinge pin height, carry position	575 mm	1'11"
D Ground clearance	450 mm	1'6"
E Hitch height	1,115 mm	3'8"
F Overall height, top of the stack	3,665 mm	12'0"
G Overall height, ROPS cab	3,785 mm	12'5"

Measured with 875/65-R29 tires

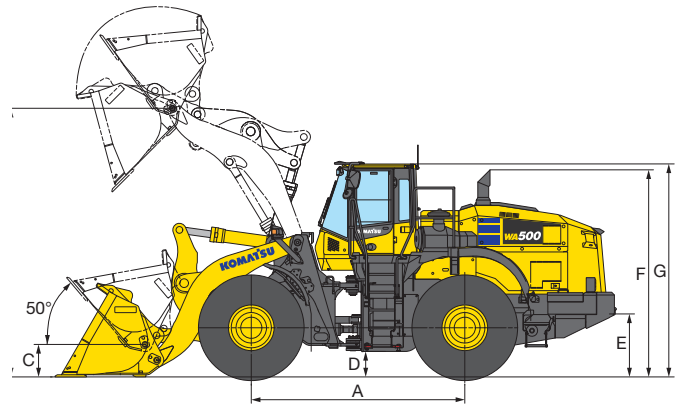

	Loose material bucket	Asbury flat bottom bucket	Asbury flat bottom bucket	Hensley flat bottom bucket	Hensley flat bottom bucket
	Bolt-on cutting edge	Bolt-on cutting edge	Bolt-on cutting edge	Bolt-on cutting edge	Bolt-on cutting edge
Bucket capacity: heaped	6.3 m ³	7.0 m ³	7.5 m ³	7.0 m ³	7.5 m ³
	8.2 yd ³	9.1 yd ³	9.8 yd ³	9.2 yd ³	9.8 yd ³
struck	5.3 m ³	6.0 m ³	6.3 m ³	6.0 m ³	6.3 m ³
	6.9 yd ³	7.8 yd ³	8.2 yd ³	7.8 yd ³	8.2 yd ³
Bucket width	3400 mm	3581 mm	3581 mm	3581 mm	3581 mm
	11'2"	11'9"	11'9"	11'9"	11'9"
Bucket weight	3492 kg	3828 kg	3716 kg	3582 kg	3714 kg
	7,698 lbs.	8,439 lbs.	8,193 lbs.	7,897 lbs.	8,187 lbs.
Dumping clearance, max. height and 45° dump angle* (H)	3210 mm	3162 mm	3123 mm	3171 mm	3123 mm
	10'6"	10'4"	10'3"	10'5"	10'3"
Reach at max. height and 45° dump angle*	1585 mm	1634 mm	1673 mm	1625 mm	1673 mm
	5'2"	5'4"	5'6"	5'4"	5'6"
Reach at 2130 mm 7" clearance and 45° dump angle	2350 mm	2356 mm	2395 mm	2371 mm	2397 mm
	7'8"	7'9"	7'10"	7'9"	7'10"
Reach with arm horizontal and bucket level	3385mm	3450 mm	3505 mm	3437 mm	3505 mm
	11'1"	11'4"	11'6"	11'3"	11'6"
Operating height (fully raised)	6540 mm	6923 mm	7045 mm	6677 mm	6805 mm
	21'5"	22'9"	23'1"	21'11"	22'4"
Overall length (bucket on ground)	10035 mm	10102 mm	10157 mm	10083 mm	10151 mm
	32'11"	33'2"	33'4"	33'1"	33'4"
Loader clearance circle (bucket at carry, outside corner of bucket)	16550 mm	16693 mm	16722 mm	16688 mm	16723 mm
	54'4"	54'9"	54'10"	54'9"	54'10"
Digging depth: 0°	135 mm	135 mm	135 mm	135 mm	135 mm
	5"	5"	5"	5"	5"
	10°	455 mm	470 mm	480 mm	467 mm
	1'6"	1'6"	1'7"	1'6"	1'7"
Static tipping load: straight	27840 kg	27856 kg	27719 kg	28406 kg	28116 kg
	61,376 lbs.	61,142 lbs.	61,109 lbs.	62,624 lbs.	61,985 lbs.
40° full turn	23791 kg	23773 kg	23652 kg	24272 kg	23998 kg
	52,450 lbs.	52,410 lbs.	52,143 lbs.	53,510 lbs.	52,906 lbs.
Breakout force	266 kN	257 kN	249 kN	259 kN	249 kN
	27124 kg	26207 kg	25391 kg	26411 kg	25391 kg
	59,799 lbs.	57,776 lbs.	55,977 lbs.	58,226 lbs.	55,977 lbs.
Operating weight	36581 kg	36677 kg	36813 kg	36678 kg	36810 kg
	80,647 lbs.	80,859 lbs.	81,158 lbs.	80,861 lbs.	81,152 lbs.

* At the end of tooth or BOCE

All dimensions, weights, and performance values based on SAE J732c and J742b standards.

Static tipping load and operating weight shown include lubricant, coolant, full fuel tank, ROPS cab, and operator.

Machine stability and operating weight affected by counterweight, tire size, and other attachments.

Apply the following weight changes to operating weight and static tipping load.

Equipment

Alternator, 90 A	•
Auto shift transmission with mode select system	•
Automatic digging system	•
Automatic hydraulic-driven fan with automatic reverse rotation	•
Back-up alarm	•
Batteries, 160 Ah/12 V (2)	•
Battery disconnect	•
Brake cooling system	•
Boom kick-out, in-cab adjustable	•
Bucket positioner, upper/lower in-cab adjustable, 3 positions	•
Color rearview camera and monitor	•
Counterweight, standard and additional for yard loader (logging counterweight)	•
Electronically controlled suspension system (ECSS)	•
Engine, Komatsu SAA6D140E-7 diesel	•
Engine shut-off system, electric	•
Engine shutdown secondary switch	•
EPC fingertip controls with F-N-R switch, two levers	•
Equipment Management Monitoring System (EMMS)	•
- Lights (central warning, brake oil pressure, engine oil pressure, parking brake, cooling fan reverse, KDPF restriction, seat belt caution, Komtrax message)	
- Gauges (engine water temperature, ecology, fuel level, DEF levels, hydraulic oil temperature, speedometer/tachometer)	
Front fenders	•
Front frame steps with grab handles	•
Fuel pre-filter with water separator	•
Horn, electric	•
Komatsu Smart Loader Logic	•
Komatsu Auto Idle Shutdown	•
Komtrax Level 5	•
Lift cylinders and large capacity bucket cylinder	•
Lights	•
- Back-up light, LED	
- Stop and tail light, LED	
- Turn signal, two front and two rear with hazard switch	
- Working lights, halogen, two front cab mount	
- Working lights, halogen, two front fender mount	
- Working lights, halogen, two rear	
Load meter*	•
Loader linkage with standard lift arm	•
Lock-up torque converter	•
Parking brake, electric	•
Radiator, wider core	•
Radiator mask, swing out	•
Rear full fenders	•
Rearview mirrors, outside (2) inside (2)	•

ROPS/FOPS Cab Level 2	•
- 2 x 12VDC electrical outlets	
- Ashtray	
- Auto air conditioner	
- Cigarette lighter, 24 V	
- Color LCD/TFT multi-monitor	
- Cup holder	
- Floor mat	
- Operator seat, reclining, air suspension type, heated	
- Radio, Bluetooth, AM/FM with AUX input jack	
- Rear defroster, electric	
- Seatbelt, two-point retractable, 76 mm 3" width	
- Space for lunchbox	
- Steering wheel, tilt and telescopic	
- Sun visor, front window	
- Windshield washer and wiper, front with intermittent	
- Windshield washer and wiper, rear	
Service brakes, wet disc type	•
Starting motor, 11 kW	•
Transmission, four forward and four reverse	•
Two-spool valve for boom and bucket control	•
Vandalism protection kit	•
Advanced joystick steering system	○
Auxiliary steering (SAE)	○
Engine pre-cleaner with extension	○
Graco autolube system	○
Limited slip differential (F and R)	○
Mono-lever loader control with transmission F-N-R switch	○
Powertrain guard	○
Rims and tires, 875/65-R29 XHAZ L2	○
Various Asbury bucket options	○
Various Hensley bucket options	○
Wheel chocks	○

* Restrictions apply based on machine configuration. Load meter is not available for machines with MF monolever, 3rd spool hydraulic arrangement or coupler. Consult your local Komatsu distributor for details.

Standard equipment	•
Optional equipment	○

Product designs, specifications and/or data in this document are provided for informational purposes only and are not warranties of any kind. Product designs and/or specifications may be changed at any time without notice. The only warranties that apply to sales of products and services are Komatsu's standard written warranties, which will be furnished upon request.

Komatsu and other trademarks and service marks used herein are the property of Komatsu Ltd., Komatsu America Corp., Komatsu Mining Corp., or one of their affiliates, or the respective owners or licensees.

KOMATSU

komatsu.com

